


# HYDROPHIL uPVC PIPES

## BLUE IN-HOUSE

### SPECIFICATIONS

STANDARD	PNS 65	Nominal Size		Thickness		Nominal Pressure Rating (at 20°C)	
		O.D. (mm)	(in)	Min. (mm)	Max. (mm)	(MPa)	(psi)
SIZES	20mmØ to 63mmØ (¾"Ø to 2"Ø) in standard lengths of 3.0m	20	¾	2.0	2.4	1.03	150
COLOR	Blue	25	¾	2.5	2.9	1.03	150
MATERIAL	100% virgin materials conforming to BPS and related ISO standards	32	1	2.5	3.0	1.03	150
		40	1¼	2.2	2.6	1.03	150
JOINT METHODS	Solvent cement	50	1½	2.7	3.2	1.03	150
		63	2	3.4	4.0	1.03	150

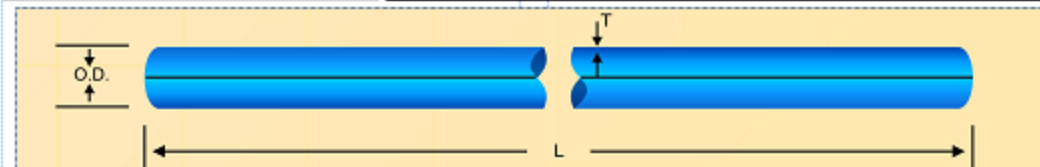

### Fittings

Fittings	Sizes for each Fitting	
Coupling	20mm	¾"
Elbow 90°	25mm	¾"
Elbow 45°	32mm	1"
Tee	40mm	1¼"
Threaded Elbow	50mm	1½"
Threaded Tee	63mm	2"
Female Adapter	75mm	2¼"
Male Adapter	90mm	3"
Cap	110mm	4"
Bushing Reducer	¾" x ½"	1½" x 1¼"
Coupling Reducer	1" x ¾"	2" x 1½"
Elbow Reducer	1" x ¾"	2" x 1¼"
Tee Reducer	1¼" x 1"	

### Applications

- Potable water systems
- In-house plumbing

### Advantages

- Manufactured from only 100% virgin materials and conforms to the Philippine Bureau of Product Standards and related ISO Standards for a guarantee of quality, safety and durability.
- Smoother interior surface reduces friction loss — more water delivered at the same pressure rating.
- Non-corrosive, thus ensuring the user's health and safety.
- The most durable uPVC potable water piping system designed to withstand high-pressure potable water applications.

## HYDRO PHIL. ASIA, INC.

Plant and Office: 393 G. P. Purok 3, Brgy. Lumang Bayan, Plaridel, Bulacan  
Tel./Fax No. (044) 795-2182

Sales Office & Warehouse: 4 East Berkeley St., California Village, San Bartolome, Novaliches, Quezon City  
Tel. No. (02) 935-8535/936-7546 Fax No. (02) 939-8094

E-mail: hydrophilasia@gmail.com, info@hydrophilasia.com

Website: hydrophilasia.com

Philippine Standard  
Quality Certification Mark



CERTIFIED  
Product Quality